

OV25 Check Valve Dual Short

Features

- ✓ Easy to insert
- ✓ 100% factory tested for sealing operation
- ✓ low headloss
- ✓ low cracking pressure
- ✓ External oring groove
- ✓ Spring loaded plunger
- ✓ Locking tabs - no retainer required

Check Valve External Dimensions


OD#1	24.75
ID	16.00
Height	47.00

Materials

Outer Cap	Acetal
Inner Core	Acetal
Plunger	Acetal
Body	Acetal
Spring	304 S/S
Seal	EPDM 5613
O'ring	EPDM 5711

FLOW RATE CURVE

Pressure Loss Dual Check 16mm

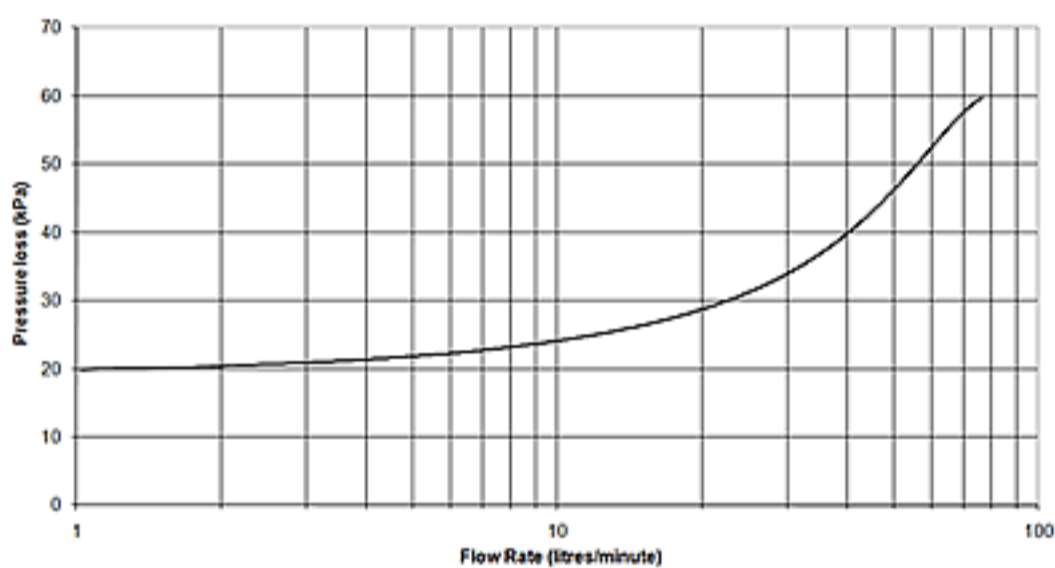

Certification

Potable Water	AS4020
Performance	AS2845.1

Technical Data

Service Temperature

Max C	60
Min C	0

Service Pressure

Max Kpa	2000
Min Kpa	0

Fluid Clean Water

Opening Pressure

